



# D-BOX AND DIGIDESIGN 003 SETUP



iPOD OUT TO ANALOG INPUT MINI 1/8"-2XLR(M)




AES OR S/PDIF CD PLAYER OUT TO CD DIGITAL INPUT XLR(F)-XLR(M)



ATTACH POWER SUPPLY TO D-BOX BEFORE WALL

MAIN SPEAKER OUT TO POWERED MONITOR INPUTS XLR(F)-XLR(M)

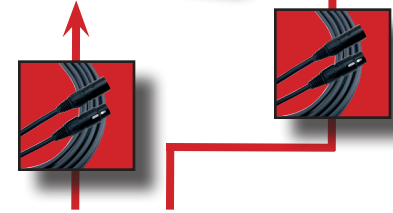

8 OUTPUTS TO SUMMING INPUT 1/4" BALANCED-DB25





S/PDIF OUTPUT TO DAW DIGITAL INPUT RCA-XLR(M)



SUM OUTPUTS TO 5-6 OR 7-8 INPUTS XLR(F)-TRS



ALT SPEAKER OUT TO POWERED MONITOR INPUTS XLR(F)-XLR(M)

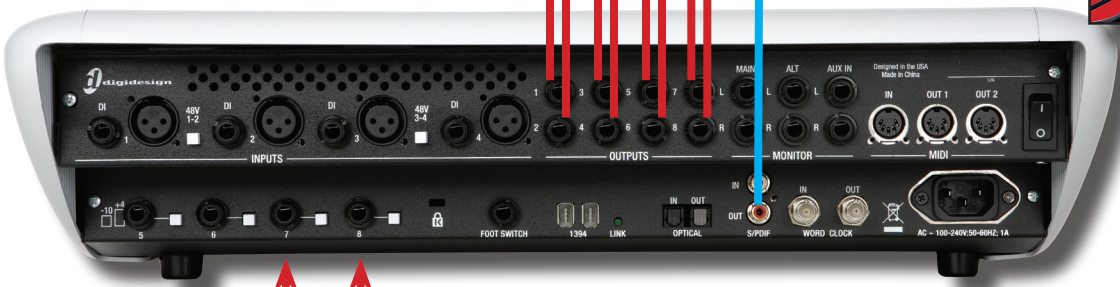

ANALOG CABLE:	
DIGITAL CABLE:	
POWER CABLE:	